




WASSERPRESS 20

Hose Construction

- Tube:** Black, smooth EPDM nitrosamine free rubber compound
- Reinforcement:** Synthetic textile yarns
- Cover:** Black, with four longitudinal coloured stripes, smooth, abrasion, heat, ageing and weathering resistant EPDM nitrosamine free rubber compound

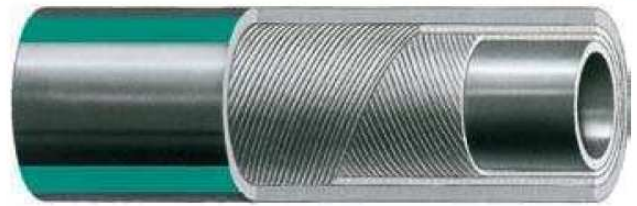

Applications

Suitable for discharge of hot and cold water, air and light-chemical medias in many industrial and agricultural applications.

Tolerances

According to UNI EN ISO 1307/97

On inside diameter:

I.D. 10 - 19 mm: ± 0,80 mm

I.D. 25 mm: ± 1,20 mm


Length tolerance: ± 1 %


Temperature Range


-40 °C (-40 °F) to +120 °C (+248 °F)


Colour stripes coding







Y = yellow 

A = orange 

B = blue 

R = red 

V = green 

IHXXXXXXXX/XX Part Number/ Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
WASSERPRESS 20 4Y										
IH30118016/40	10	18	2,0	300,0	20	6,0	900,0	60	0,24	80
IH30118003/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118011/40	16	24	2,0	300,0	20	6,0	900,0	60	0,35	130
IH30118004/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
IH30118005/40	25	34	2,0	300,0	20	6,0	900,0	60	0,57	200
WASSERPRESS 20 4Y NB/L										
IH30118029/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118030/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
IH30118031/40	25	34	2,0	300,0	20	6,0	900,0	60	0,57	200
WASSERPRESS 20 4A										
IH30118020/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118021/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
IH30118022/40	25	34	2,0	300,0	20	6,0	900,0	60	0,57	200
WASSERPRESS 20 4B										
IH30118025/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118026/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
IH30118027/40	25	34	2,0	300,0	20	6,0	900,0	60	0,57	200
WASSERPRESS 20 4B NY/L										
IH30118035/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118036/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
WASSERPRESS 20 4R										
IH30118007/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118010/40	16	24	2,0	300,0	20	6,0	900,0	60	0,35	130
IH30118008/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
IH30118009/40	25	34	2,0	300,0	20	6,0	900,0	60	0,57	200
WASSERPRESS 20 4V										
IH30118012/40	13	20	2,0	300,0	20	6,0	900,0	60	0,25	100
IH30118013/40	15	23	2,0	300,0	20	6,0	900,0	60	0,33	125
IH30118006/40	19	27	2,0	300,0	20	6,0	900,0	60	0,40	150
IH30118014/40	25	34	2,0	300,0	20	6,0	900,0	60	0,57	200

RUBBER HOSE WASSERPRESS 20 bar MADE IN ITALY Parker ITR

